

RETRO-Fusion™ 2.0 300

300W Incandescent Replacement LED Engine
120V • 230V • 240VAC

Energy efficient LED Light Engine

Designed to retrofit directly into existing fixtures.

The RETRO-Fusion 2.0 is a TUV listed, Energy Star 2.0 retrofit kit that rapidly transforms existing inefficient incandescent fixtures into energy efficient LED fixtures. Our patented technology allows the fixture to smoothly dim from 0-100% utilizing existing dimming technology. Retrofit kits are available with a variety of options for both recessed and pendant style fixtures. Installation is as easy as changing a light bulb. Our LED technology creates even fields and delivers consistent color. The RETRO-Fusion 2.0 300 delivers more light than most 300 watt incandescent bulbs it replaces with only a 30 watt load.



Fairfax High School, Fairfax, Virginia
105 RETRO 500s at 3000K
Installed by Artistic Concepts Group

What the Fusion 2.0 IS

- More cost effective than fixture replacement
- Large lumen output for this section of the market
- Listed for screw in replacement
- Field swappable bases
- Removable safety cable
- Energy Star certified 2.0
- Dims on existing dimming systems with no additional installation of control system
- 0-100% dimming without flicker, pulse, or stepping
- 80+ High CRI

Electrical Data

- 30 Watts (30.61)
- Lumens 3237 @ 2700K
- Power Factor (PF) .9936
- Lumens per watt: 105.74
- LM 70: >50,000 Hours
- CRI@2700K: 81.73,R9+2.6
- 1 lb 11.7 oz w/Reflector (.820 kg)

Applications

- 9 feet to 40 feet high ceilings (2.75 - 12.25 meter high ceilings)
- Where dimming is a key concern
- Where there is no desire or budget to replace existing fixtures
- Where access is limited
- Where Energy Star is required
- Where a custom solution is required
- Where the ceiling cannot be disturbed

Typical Installations

- Auditoriums
- Houses of worship
- Arenas
- Lobbies
- Museums
- Educational facilities
- Convention centers

Base Types

E26 - Edison
E11 - Mini Candelabra
E39 - Mogul *
BA15D *
Par Ring/Bare Wire
Bi-Pin
Custom Options

CCT Lumen Output

2700K: 3237 Lumens
3000K: 3416 Lumens
3500K: 3481 Lumens
4000K: 3563 Lumens
5000K: 3624 Lumens

Fixture Lenses

Tall 11 Degrees
Tall 20 Degrees
Tall 47 Degrees
Short 15 Degree
Short 28 Degree
Short 56 Degrees
Short 74 Degrees
None 120 Degrees

Color Temp

2700K -
3000K - Standard
3500K -
4000K -
5000K -

*E39 and BA15D require an E26 base with adaptors used to make this unit compatible with these base types.


* Chips with a CRI greater than 80 are an additional 6 weeks beyond standard delivery

RETRO-Fusion™ 2.0 300

300W Incandescent Replacement LED Engine
120V • 230V • 240VAC

CANTOUSA
INNOVATIVE LIGHTING PRODUCTS

Fixture Drawing

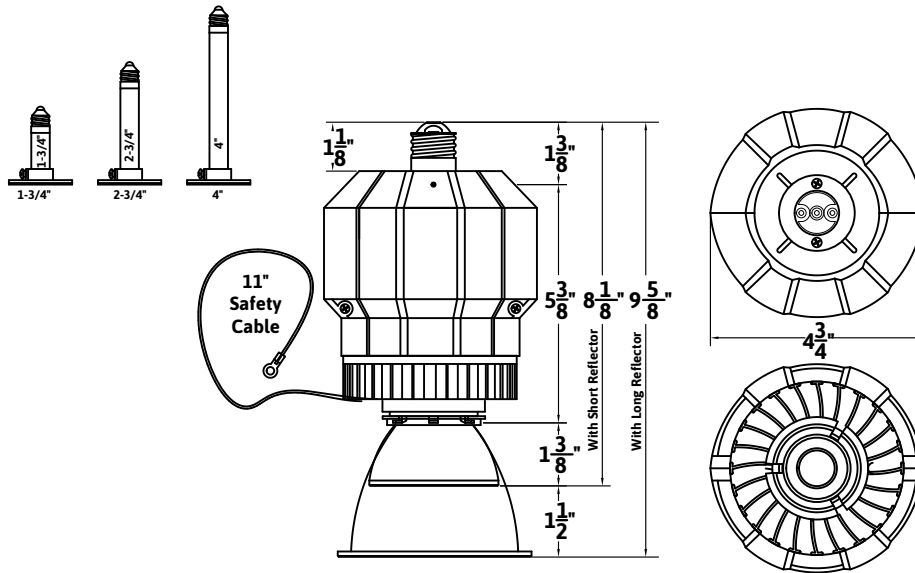

Weight: 1lb 11.7oz w/Reflector
.820 kg w/Reflector

Photometrics (R300) 3,000K

Multiplication Factor for Color Temperature

- to convert to 2,700 Kelvin - fc X .9488
- to convert to 3,500 Kelvin - fc X 1.0196
- to convert to 4,000 Kelvin - fc X 1.0439
- to convert to 5,000 Kelvin - fc X 1.0617

To Solve Footcandles
Over A Distance

Peak Output ÷ (Distance X Distance)

To Solve Area Over A
Distance

Distance X Mult.Factor

Mult. Factor 0.4617 Distance	15° Diameter	Peak Output 2,203fc Foot Candles	Mult. Factor 0.7279 Distance	28° Diameter	Peak Output 4,610fc Foot Candles	Mult. Factor 1.1315 Distance	56° Diameter	Peak Output 2,134fc Foot Candles	Mult. Factor 1.4004 Distance	74° Diameter	Peak Output 1,134fc Foot Candles
8'	2'	360	8'	4'	141	8'	9'	61	8'	11'	41
10'	3'	222	10'	5'	85	10'	11'	37	10'	14'	25
20'	5'	49	20'	10'	18	20'	21'	8	20'	28'	5
30'	8'	21	30'	15'	8	30'	32'	4	30'	42'	2
40'	11'	11	40'	20'	5	40'	42'	1	40'	56'	1
Mult. Factor .1926 Distance	11° Diameter	Peak Output 26,920fc Foot Candles	Mult. Factor 0.4069 Distance	20° Diameter	Peak Output 19,252fc Foot Candles	Mult. Factor .8489 Distance	47° Diameter	Peak Output 5,253fc Foot Candles	Mult. Factor 3.4641 Distance	120° Diameter	Peak Output 1,134fc Foot Candles
8'	1.5'	405	8'	3'	347	8'	7'	92	8'	28'	24
10'	2'	259	10'	4'	210	10'	9'	57	9'	31'	19
20'	4'	65	20'	7'	44	20'	17'	12	10'	35'	15
30'	6'	29	30'	11'	18	30'	25'	5	12'	42'	10
40'	8'	16	40'	14'	10	40'	34'	3	15'	52'	6
									20'	69'	3

Contact your local representative or dealer for IES files.




1092 West Atlanta Street, SE • Suite 600 • Marietta, GA 30060 • 888-252-5912 • info@cantousa.com • cantousa.com

V 1.1 4/18/24

RETRO-Fusion™ 2.0 300

300W Incandescent Replacement LED Engine
120V • 230V • 240VAC

CANTOUSA
INNOVATIVE LIGHTING PRODUCTS

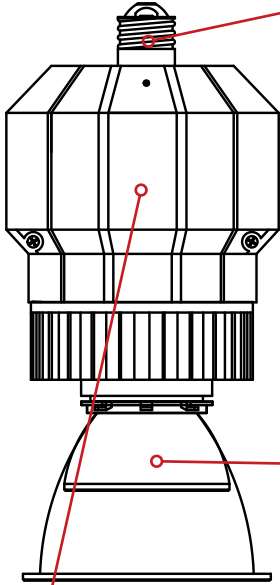

TOPS

TOP	TYPE	LENGTH
TOP	E26	1.35" min, 1.5" + increase in 1/4" increments
TOP	E11	1.75", 2.75" or 4"
TOP	BW (Bare Wire)	12" min, increase in 6" increments
TOP	PP (Par Plug)	10" standard unless specified
TOP	JB (JBox)	0.00" (Flush mount)

____ + ____ + _____ + ____ + _____
TOP TYPE LENGTH

PART NUMBER EXAMPLE: **TOP_E26_4.25** OR **TOP_PP_10**

REFLECTORS

REFLECTOR	DEGREE	REFLECTOR HEIGHT S = SHORT OR T = TALL
REF	15	T
REF	23	T
REF	26	S
REF	40	S
REF	46	T
REF	59	S
REF	70	S
REF	WW	S

____ + ____ + _____ + ____ + _____
REFLECTOR DEGREE REFLECTOR HEIGHT

PART NUMBER EXAMPLE: **REF_15_T** OR **REF_59_S**

RETRO

LIGHT	VOLTAGE	DRIVER WATTAGE	SINK SIZE	COLOR TEMP	CRI
F2	120	300	X (Standard)	2.7K	80
	230			3.0K	90
				3.5K	97
				4.0K	
				5.0K	

____ + ____ + _____ + ____ + _____ + ____ + _____ + ____ + _____
LIGHT VOLTAGE DRIVER WATTAGE SINK SIZE COLOR TEMP CRI

PART NUMBER EXAMPLE: **F2_110_1000X_2.7K_80** OR **F2_230_1000X_4.0K_90**



RETRO-Fusion™ 2.0 300

300W Incandescent Replacement LED Engine
120V • 230V • 240VAC

CANTOUSA
INNOVATIVE LIGHTING PRODUCTS




ADAPTER & EXTENDER OPTIONS

ADAPTER OR EXTENSION		TYPE	DESCRIPTION
ADP	—	BAYONET	Adapter BA15D Double Bayonet
ADP	—	MOGUL	Adapter E39 To E26 Mogul
EXT	—	1.25	Extender 1.25 Inch E26 To E26
EXT	—	2.5	Extender 2.50 Inch E26 To E26

_____ + _____ + _____
ADP or EXT TYPE

PART NUMBER EXAMPLE: **ADP_BAYONET** OR **EXT_1.25**

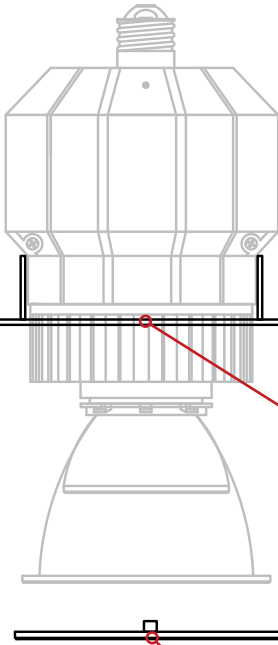

PAR RING OPTIONS

RING SIZE		F2 TYPE		FIXED OR ADJUSTABLE		
PAR46	—	3571	—	FIXED	—	KIT
PAR56	—	3571	—	ADJUST	—	KIT
PAR64	—	3571	—	ADJUST	—	KIT
PAR46	—	150T	—	FIXED	—	KIT
PAR56	—	150T	—	ADJUST	—	KIT
PAR64	—	150T	—	ADJUST	—	KIT

_____ + _____ + _____ + _____ + _____ + _____ + _____
RING SIZE F2 TYPE FIXED OR ADJUSTABLE KIT

PART NUMBER EXAMPLE: **PAR56_3571_ADJUST_KIT** OR **PAR46_150T_FIXED_KIT**

DIFFUSERS

DIFFUSER		SIZE/TYPE		KIT (IF APPLICABLE)
DIF	—	SMALL	—	
DIF	—	LARGE	—	
DIF	—	ZORYA	—	
DIF	—	SMALL	—	KIT
DIF	—	LARGE	—	KIT

_____ + _____ + _____ + _____ + _____
DIFFUSER SIZE/TYPE KIT (IF APPLICABLE)

PART NUMBER EXAMPLE: **DIF_ZORYA** OR **DIF_LARGE_KIT**

